

NEXGO T2

Version 1.1 Issued March 2020

NEXGO.CN


© 2020 NEXGO





T2

S-Shaped Desktop Terminal
With a Thermal Printer

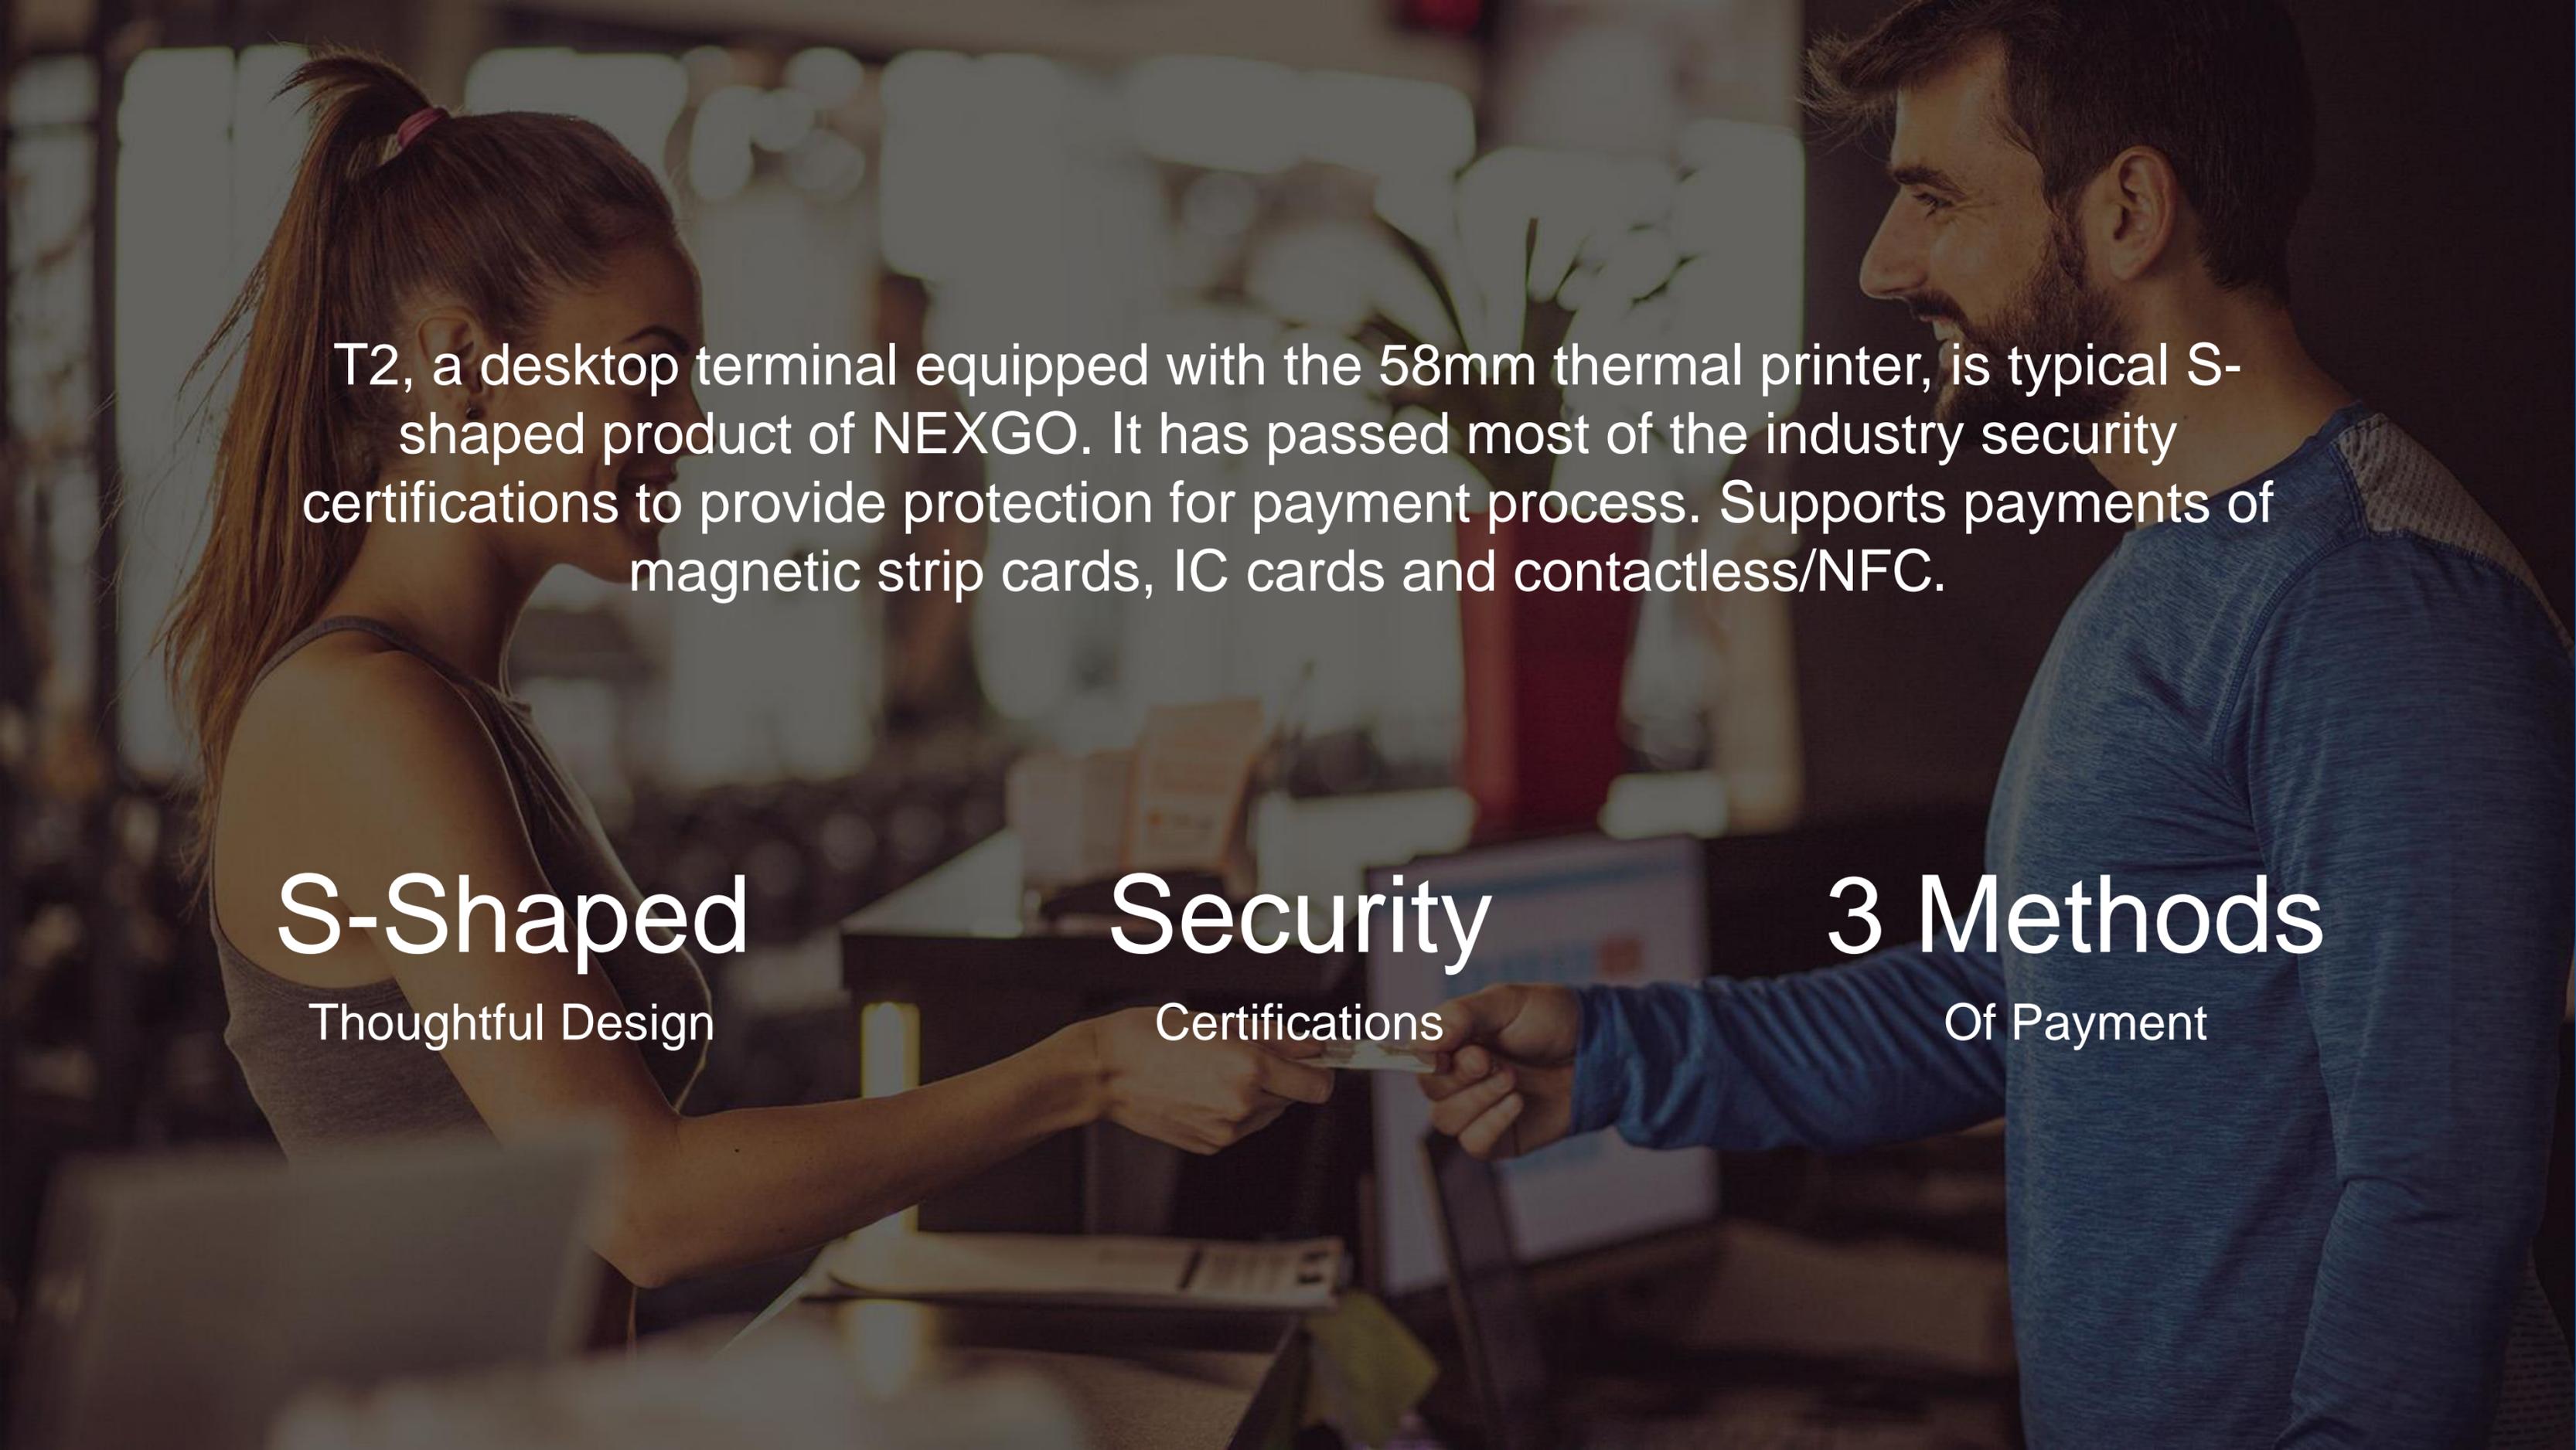

T2, a desktop terminal equipped with the 58mm thermal printer, is typical S-shaped product of NEXGO. It has passed most of the industry security certifications to provide protection for payment process. Supports payments of magnetic strip cards, IC cards and contactless/NFC.

S-Shaped

Thoughtful Design

Security

Certifications

3 Methods

Of Payment

Thoughtful Design

T2 adopts NEXGO's unique S-shaped design with thoughtful details. Users can grasp and operate it comfortably with one hand.

320 g
Weight

Embedded Keys
4 Functional Keys

33 mm
Thickness of the Position for Hand Holding





Certifications

T2 has passed the important security certifications and met the high safety level requirements of the industry, safeguarding users' information.



3 Methods of Payment

Supports payments of magnetic strip cards, IC cards and contactless/NFC .



Magnetic Strip Cards




IC Cards




Contactless/NFC

Stable and Reliable

Multiple interfaces for RS232, PIN pad, Ethernet, USB and telephone line are located on the back and left side of T2. It also provides a variety of communication modes, including modem, Ethernet, GPRS, CDMA, 3G and Wi-Fi.



Modem



Ethernet



2G



3G



Wi-Fi



T2

<p>Operating System Linux</p>	<p>Printer High Speed Thermal Printer Paper Roll Width : 50mm</p>	<p>Audio Buzzer</p>
<p>Processor 32-Bit CPU</p>	<p>Card Readers Magstripe Cards : Triple-Track, High Coercivity, Bi-Directional Smart Cards : EMV, PBOC Approved Contactless Cards : NFC 13.56MHz, ISO14443, Type A/B/C, Mifare Card (Optional)</p>	<p>Power Input : 100-240V, 50-60HZ, 0.8A Output : 8.5V/2.5A</p>
<p>Memory 256M FLASH, 128M RAM</p>		<p>Physical 175mm L x 81mm W x 68mm H 320g</p>
<p>Display 2.8" QVGA (320 x 240) Color LCD Resistive Touchscreen, E-signature Supported(Optional)</p>	<p>Peripheral Ports 1 x RS232, 1 x PINPAD, 1 x Ethernet, 1 x USB Host, 1 x Micro-USB, 1 x Telephone line; PSAM : 3, SIM : 1(PSAM card slot, 2 in 1), SD : 1.</p>	<p>Environmental Operating Temperature : 0° C to 50° C Storage Temperature : -20° C to 60° C Relative Humidity : 5% to 95%(Non-Condensing)</p>
<p>Keypad 10 Numeric Keys 10 Function Keys</p>	<p>Communication Modem / Ethernet GPRS / CDMA / 3G / Wi-Fi (Optional)</p>	<p>Security PCI4.X, UPTS 2.0 Approved</p>

THANK YOU!

NEXGO.CN

© 2020 NEXGO

